


4 CORE FTTH FIBER OPTIC

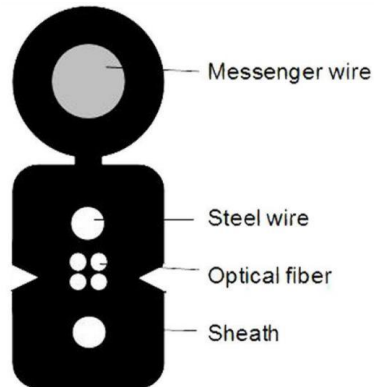

Item	Fiber Optic Drop Cable
Core	4 Core (Blue, Orange, Green, Brown)
Mode Type	SM
Cable Diameter	3.0*6.0mm
Color	Black
Fiber Type	G657A2
Sheath Material	LSZH
Messenger	1.0mm steel
Central Strength	2*0.45 mm Steel
Min. bending radius (mm)	10 (Static) 25 (Static) 30 (Static) 60 (Static)
Attenuation (dB/km)	≤ 0.4 at 1310nm, ≤ 0.3 at 1550nm
Short term tensile (N)	200; 600
Installation Temperature	-0°C to + 60°C
Operating Temperature	-20°C to + 70°C
Storage Temperature	-20°C to + 70°C